
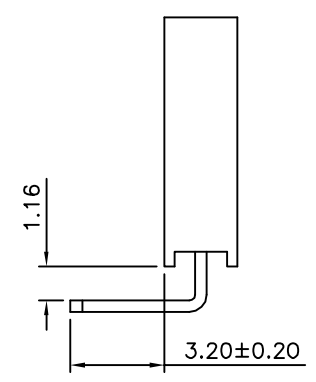
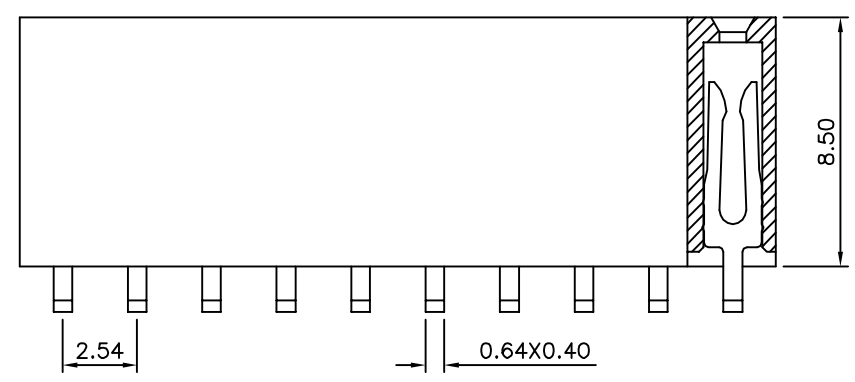


Recommended P.C.B. Layout

**SPECIFICATION**

Current Rating:3.0 Amps/Contact Max.  
 Withstanding Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Brass,Gold Plated Over Nickel  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 RoHS Compliant

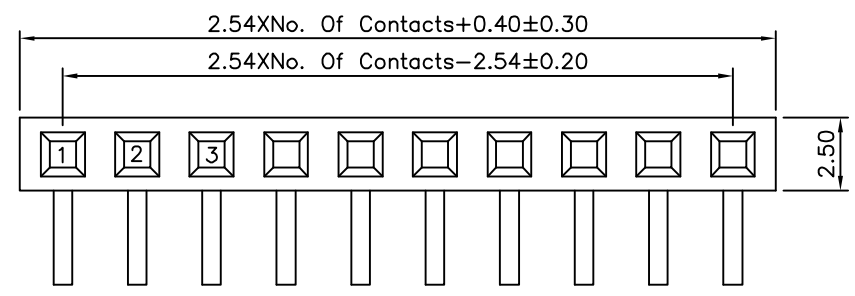

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
18166		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		QQJ	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.50  
 XX ±0.30  
 XXX ±0.20  
 ANG. ±5°

UNIT	mm	NO. REV.		REVISIONS		CHK	DATE
		A0	NEW RELEASE	HZF	02/04/2010		