

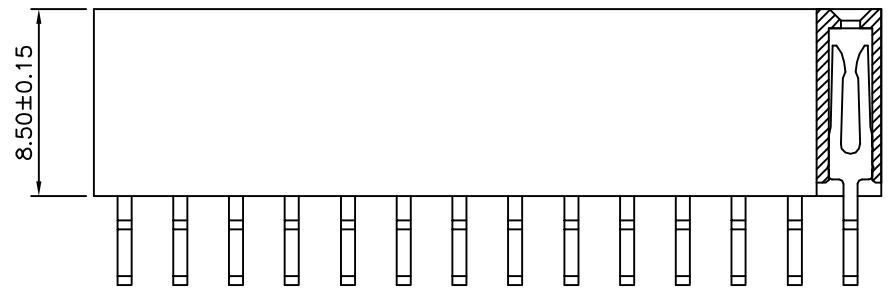


Recommended P.C.B. Layout (Top Side)
(PCB Board Tolerance ±0.05)

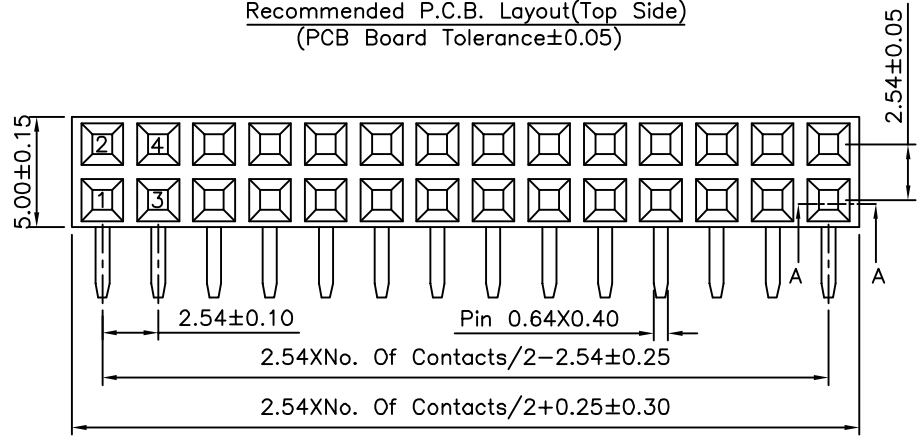

Section A-A

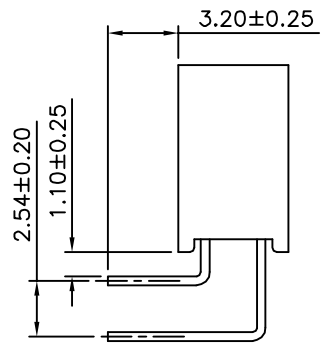

SPECIFICATION

- Current Rating: 3.0 Amp
- Withstand Voltage: 1000V AC/DC
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megaohms Min.
- Operation Temperature: -40°C ~ +105°C
- Contact: Brass, Gold Plated Over Nickel
- Insulator: PA9T+30%G.F.(UL94V-0), Black
- RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
00670		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		GAO		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/12/2012
△ A0		NEW RELEASE	HZF	07/16/2009