

电磁式蜂鸣器

12095



产品说明

1.适用范围：本规范适用于 HCW-KC1206 蜂鸣器。

This specifications apply theHCW-KC1206 buzzer.

1	额定电压 Rated voltage	5VAC
2	工作电压 Operation voltage	4-8VAC
3	声压 Sound Pressure Level=SPL	Min 85dB
4	平均消费电流 Average consumption current	Max 15mA
5	振荡频率 Oscillation frequency	4000±500Hz
6	响应时间 Response time	Max 50mS
7	工作温度范围 Range of operation temperature	-20 ~ +85°C
8	保存温度范围 Range of preservation temperature	-30 ~ +70°C
9	外部尺寸 Externals size	Φ12*10
10	重量 Mass	2g

3.电气和声学测试条件/Electrical And Acoustical Measuring Condition

☆标准状态：常温（15 ~ 35°C），湿度（25 ~ 85%相对湿度），空气压力（860 ~ 1060hpa）
在假设的情况判断，测试是 - 基本状态下进行。


Standard State: Ordinary Temp(15 ~ 35°C), Humidity(25 ~ 85%RH), Air pressure(860 ~ 1060hPa)

In case of doubtful judgment, the test is re - performed under Basic State.


☆基本情况：温度。（20±2°C），湿度（60 ~ 70%相对湿度），空气压力（860 ~ 1060hpa）

Basic State: Temp.(20±2°C), Humidity(60 ~ 70%RH), Air pressure(860 ~ 1060hPa)


<标准驱动电路>/<标标测试治具>/

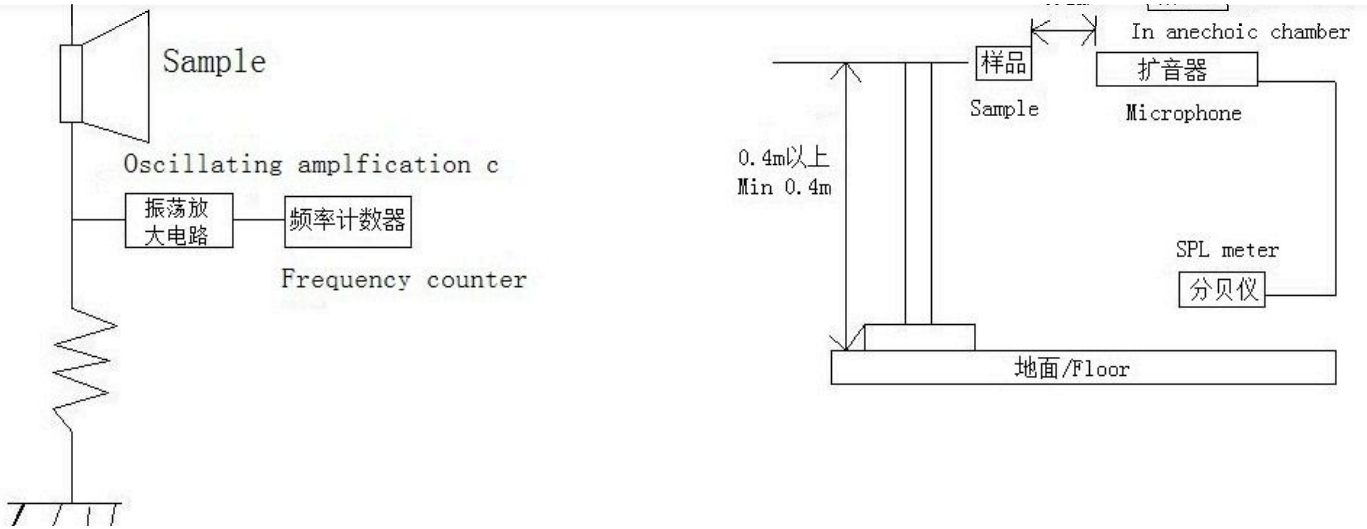

4.尺寸Dimension

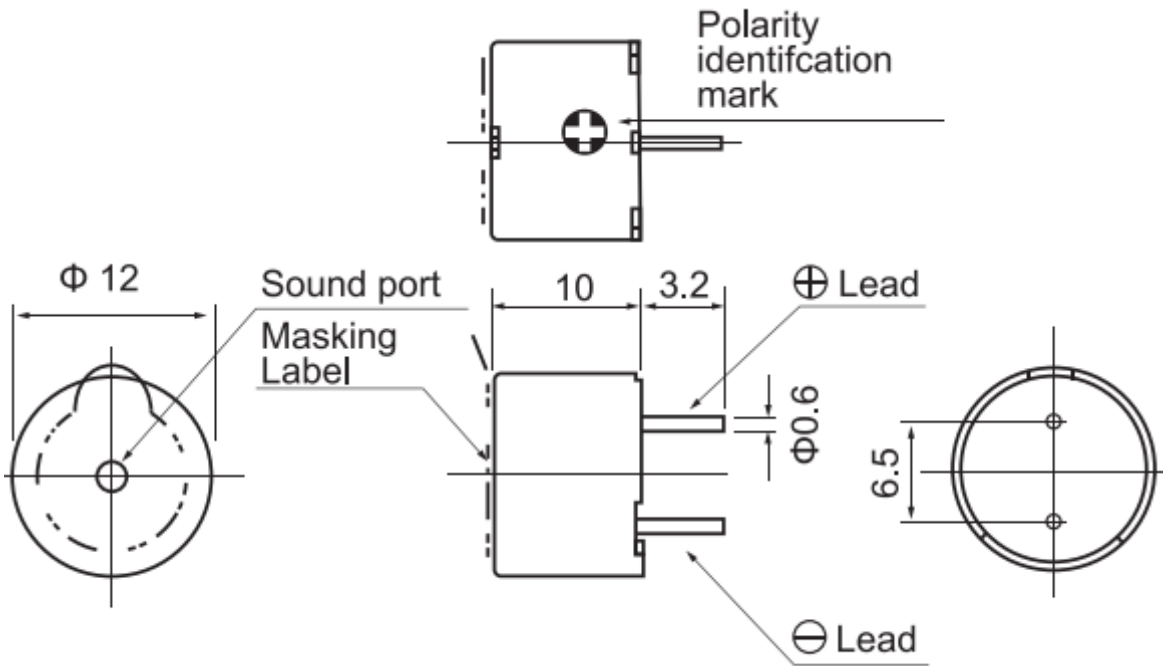

5.频率响应/FrequencyResponse

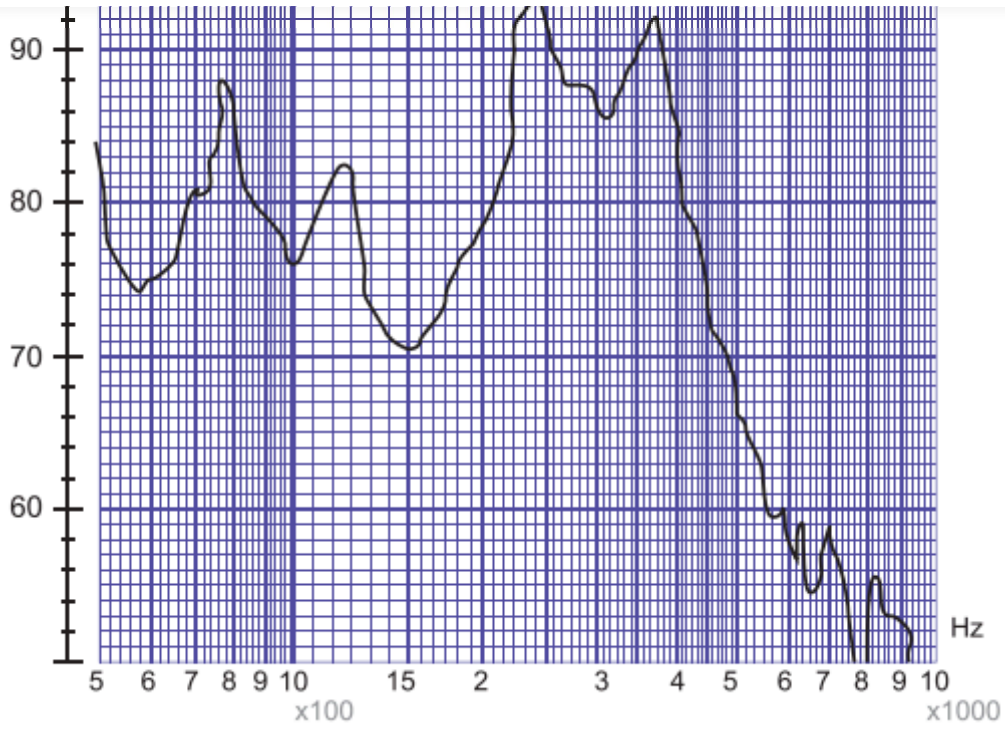

上一页

