
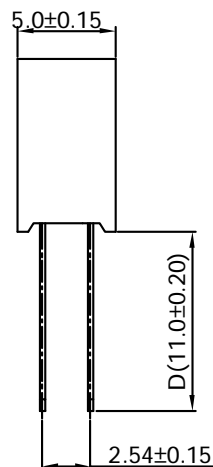


P.C.B. Hole Layout

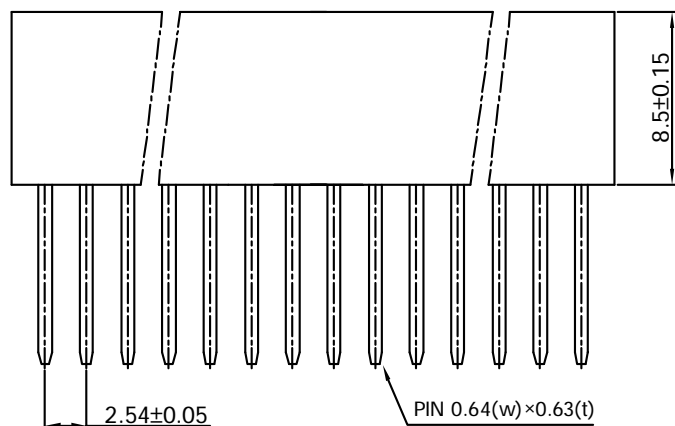

SPECIFICATIONS

Current Rating	:3 Amp
Insulator Resistance	:5000 Megohms Min.
Contact Resistance	:.20 m ohms max.
Dielectric Withstanding	:AC 1000 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester,UL 94V-0
Standard	:P.B.T
Finish	:Tin,Gold or Duplex Plated
Standard	:Gold Flash all over
Note:	
Duplex plating:	Gold Plated on contact area, Tin on Solder area

Ordering Information

F201-SGP-D110-XX

S: Straight Type

G: Gold Flash
D: Gold/Tin Plated
T: Tin Plated

(04 TO 80 Contacts)

KAWEEI[®]
www.kaweei.com

A4 SCALE (比例): 1:XX

THIRD ANGLE PROJECTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KAWEEI INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DESCRIPTION: 2.54mm Female Header 180°	DRAWN: CEL
PART NO: F201-SGP-D110-XX	CHECKED: Jack Wu
DWG NO: KWRD160804-016	APPROVAL: Jeff

GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE
LINEAR	ANGLES				
X.: ±0.30	X°: ±5.0°	UNIT: mm	1	ORIGINAL	Aug-04-2016
X.X: ±0.20	X.X°: ±3.0°	SHEET:	2		
X.XX: ±0.15	X.XX°: ±2.0°	1/1	3		
X.XXX: ±0.10	X.XXX°: ±1.0°		4		