



Single Row

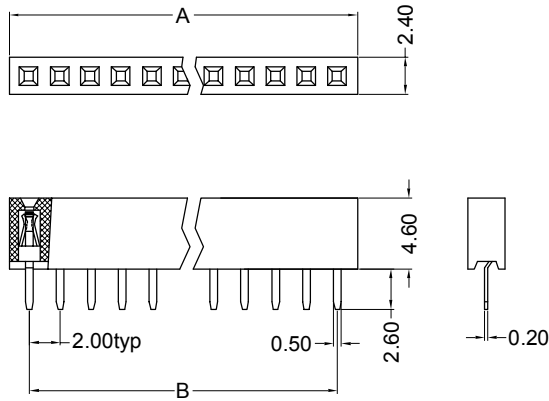

Dual Row

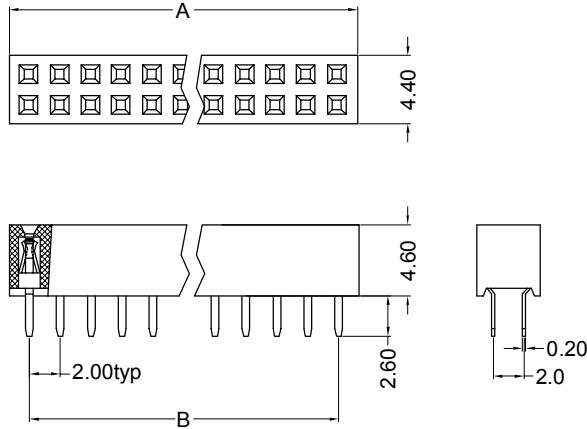

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black

接触件 Contacts: Phosphor Bronze

电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA

绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC

耐压 Withstanding Voltage: 500V AC/rms 50Hz For 1 minute

工作电流 Current Rating: 1 AMP

使用温度范围 Operating Temperature: -55°C ~ +105°C

Position	2 Thru 80
Dimension	
A± 0.20	2.00 X No.of Positions+0.4
B± 0.15	2.00 X No.of Positions -2.00

TITLE		PCB SOCKET 2.0mm 2.0#母 180°		GENERAL TOLERANCE		DRAWN BY		DATE		DENK DENG KE CONNECTOR ELECTRONICS CO., LTD 登科电子有限公司	
SERIES		DK514		x. : ±0.3 x.x: ±0.2 x.xx: ±0.1		w.j.huang		08.11.10			
CUSTOMER P/N				ANGLE TOLERANCE		CHECKED BY		DATE		DRAWING NO.	
UNITS		mm		x. : ±2° x.x: ±1° x.xx: ±0.5°		APPROVED BY		DATE		SHEET 1 OF 1	
SCALE	DESCRIPTION	CHK	DATE	SCALE	2:1	PROJECTION				SHEET SIZE A4	
1	2	3	4	5	6	7	8	9	10	11	12