RoHS Compliant

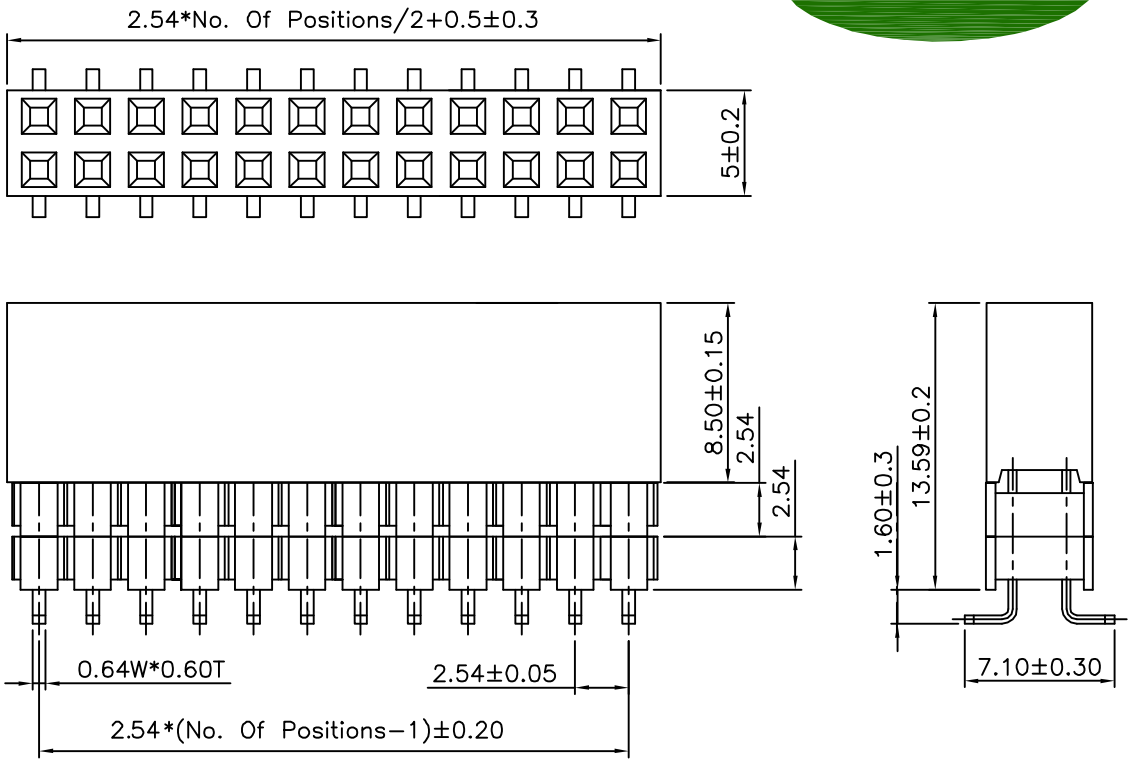

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V−0 Color:Black
Contact:Phosphor Bronze
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:−40°~+105°C

Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
CS254022−XXX−M85−0X

- B:In Tube
  C:In Tray
  F:With Cap In Tape&reel
- M:SMT Type
- G:Gold Flash
  S:Selective Gold Plated
  T:Tin Plated
- No. of Positions

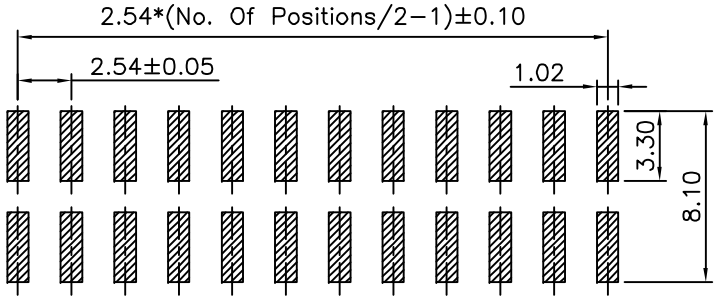

(Tolerance:0.05)
Recommended PCB Layout

A5				DR.BY.: Tom Liu	TITLE : 2.54mm Pitch Socket Header SMT Type	GENERAL TOLERANCE: LINEAR / ANGLES	KAWEEI TECHNOLOGY		
A4									
A3				CHKD.: Jack Wu					
A2					PART NO : CS254022−XXX−M85−0X	X.: ±0.30 X°: ±5.0°			
A1	ORIGINAL	Tom Liu	May−23−2011	APPD.: Kane He	DWG. NO.: CXRD110523−054	X.X: ±0.20 X.X°: ±3.0°	UNIT: mm	SCALE: 1:1	SHEET: 1/1
REV.	ECN. NO.	DR.BY	DATE		DATE: May−23−2011	X.XX: ±0.15 X.XX°: ±2.0°	THIRD ANGLE PROJECTION		A4
						X.XXX: ±0.10 X.XXX°: ±1.0°			