




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #60	Polarization: Horizontal
Standard: EN300 220(TX)	Power Source: DC 3V
Test item: Radiation Test	Date: 13/11/14/
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 17/26/19
EUT:	Engineer Signature: PEI
Mode: TX 868MHz	Distance: 3m
Model: RFM69HCW-868S2(10dBm)	
Manufacturer:	

Note:

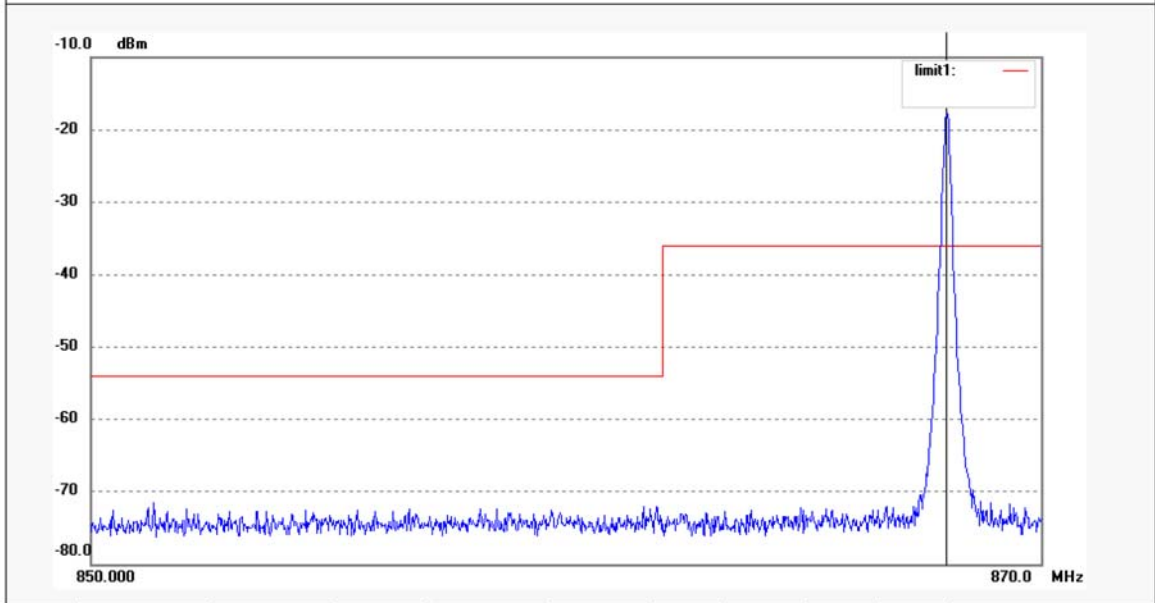

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	867.9952	-5.81	8.11	2.30	-36.00	38.30	peak			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #62	Polarization: Vertical
Standard: EN300 220(TX)	Power Source: DC
3V Test item: 13/11/14/	Radiation Test Date:
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 17/30/12
EUT:	Engineer Signature: PEI
Mode: TX 868MHz	Distance: 3m
Model: RFM69HCW-868S2(10dBm)	
Manufacturer:	

Note:

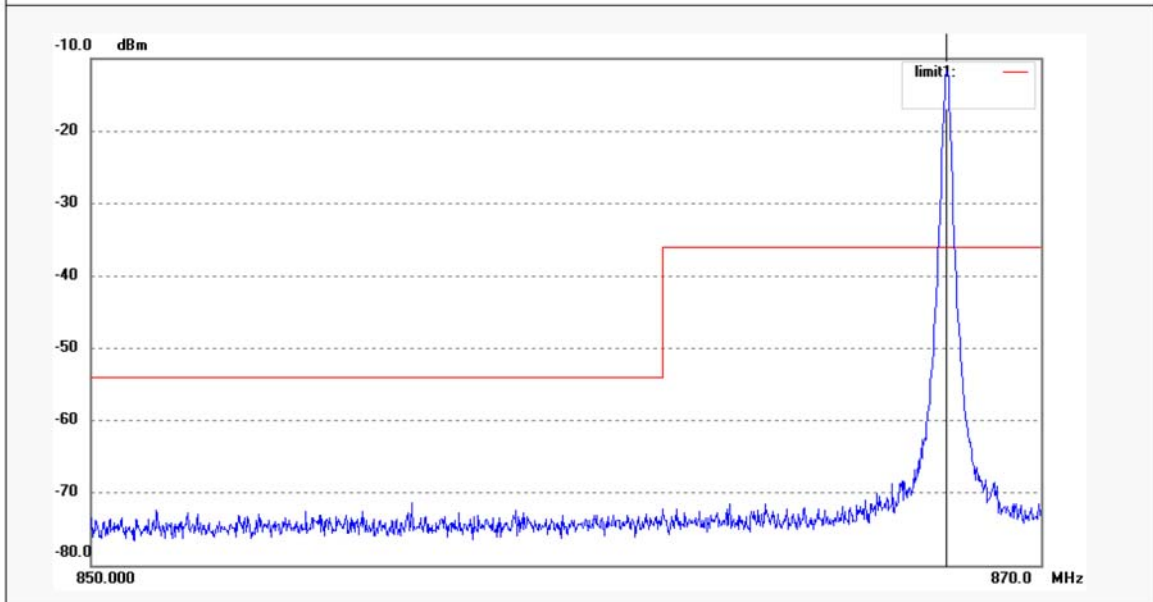

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	867.9952	0.39	8.02	8.41	-36.00	44.41	peak			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #67	Polarization: Horizontal
Standard: EN300 220(TX)	Power Source: DC 3V
Test item: Radiation Test	Date: 13/11/14/
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 17/44/21
EUT:	Engineer Signature: PEI
Mode: TX 868MHz	Distance: 3m
Model: RFM69HCW-868S2(10dBm)	
Manufacturer:	

Note:

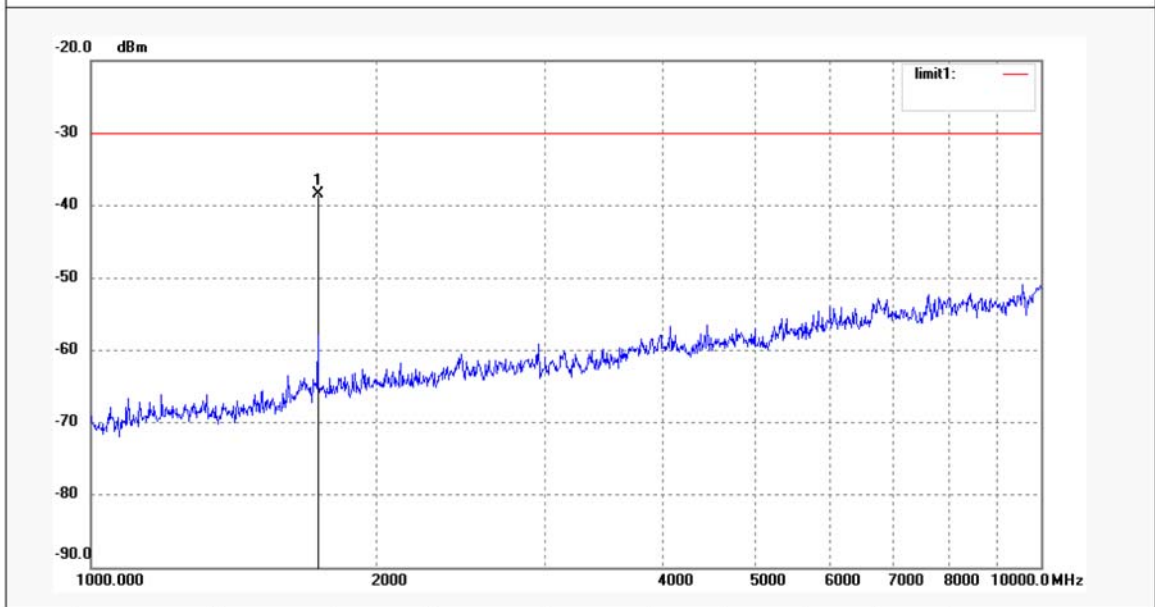

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1736.519	-38.78	0.32	-38.46	-30.00	-8.46	peak			




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: hp #68	Polarization: Vertical
Standard: EN300 220(TX)	Power Source: DC
3V Test item: 13/11/14/	Radiation Test Date:
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 17/46/48
EUT:	Engineer Signature: PEI
Mode: TX 868MHz	Distance: 3m
Model: RFM69HCW-868S2(10dBm)	
Manufacturer:	

Note:

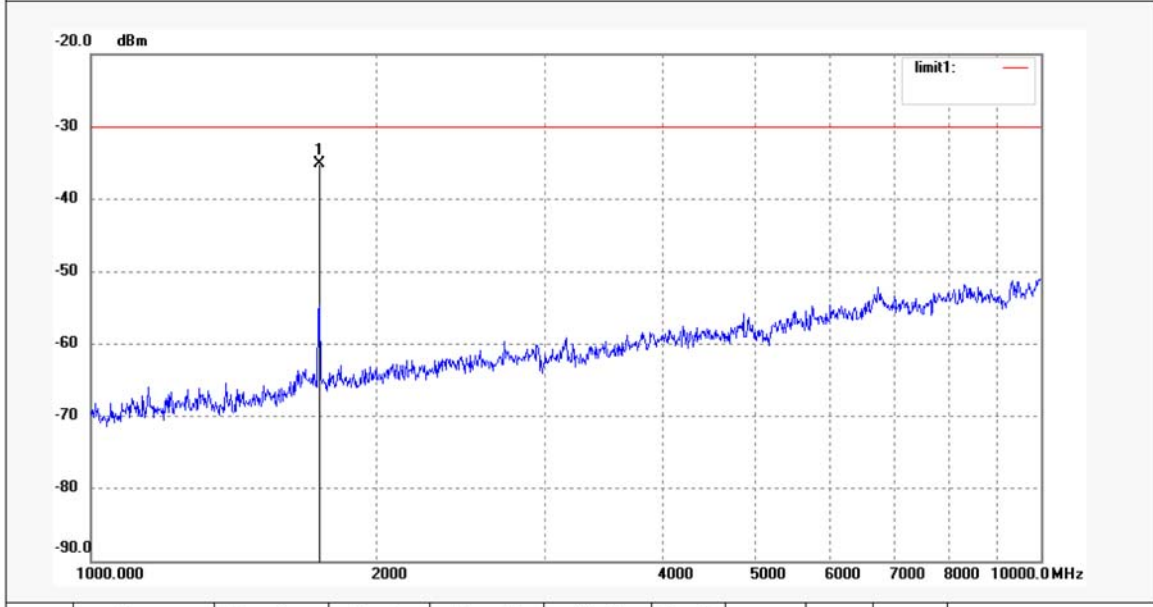

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1736.519	-35.50	0.32	-35.18	-30.00	-5.18	peak			