



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #262
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:44:36
Engineer Signature: PEI
Distance: 3m

Note:

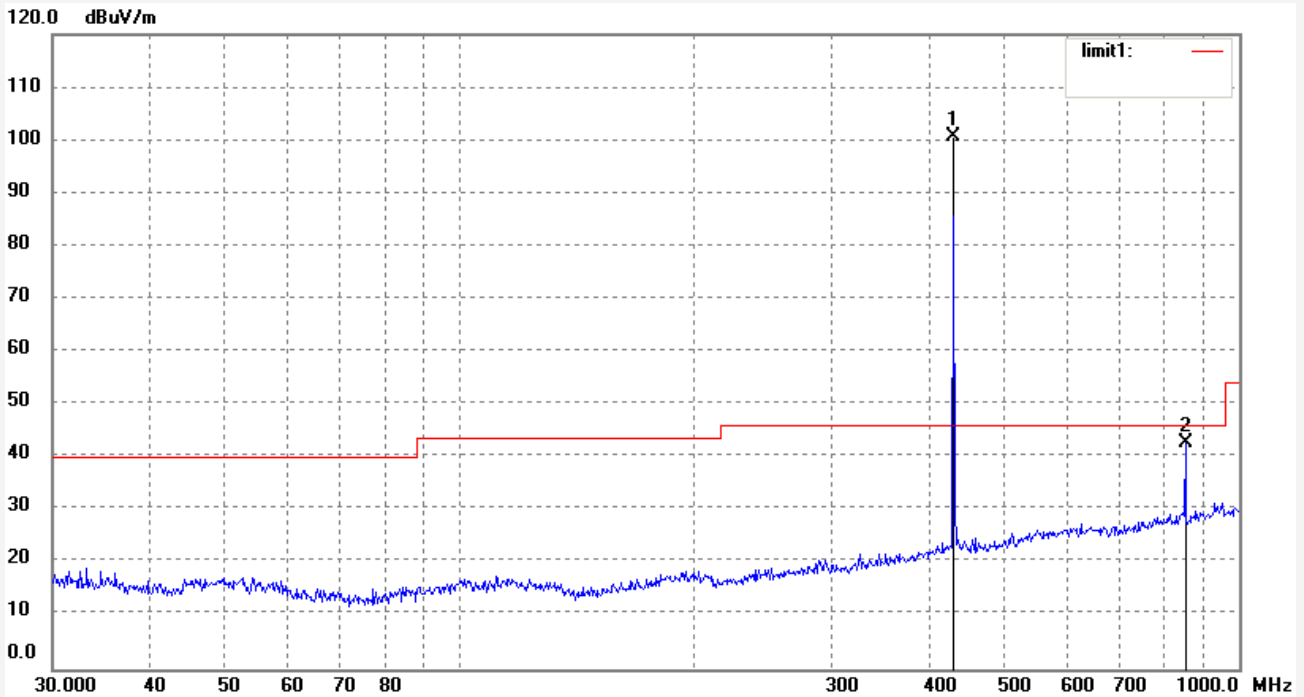

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	430.3053	106.79	-6.03	100.76	46.00	54.76	peak			
2	853.7546	42.04	0.74	42.78	46.00	-3.22	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #263
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:46:33
Engineer Signature: PEI
Distance: 3m

Note:

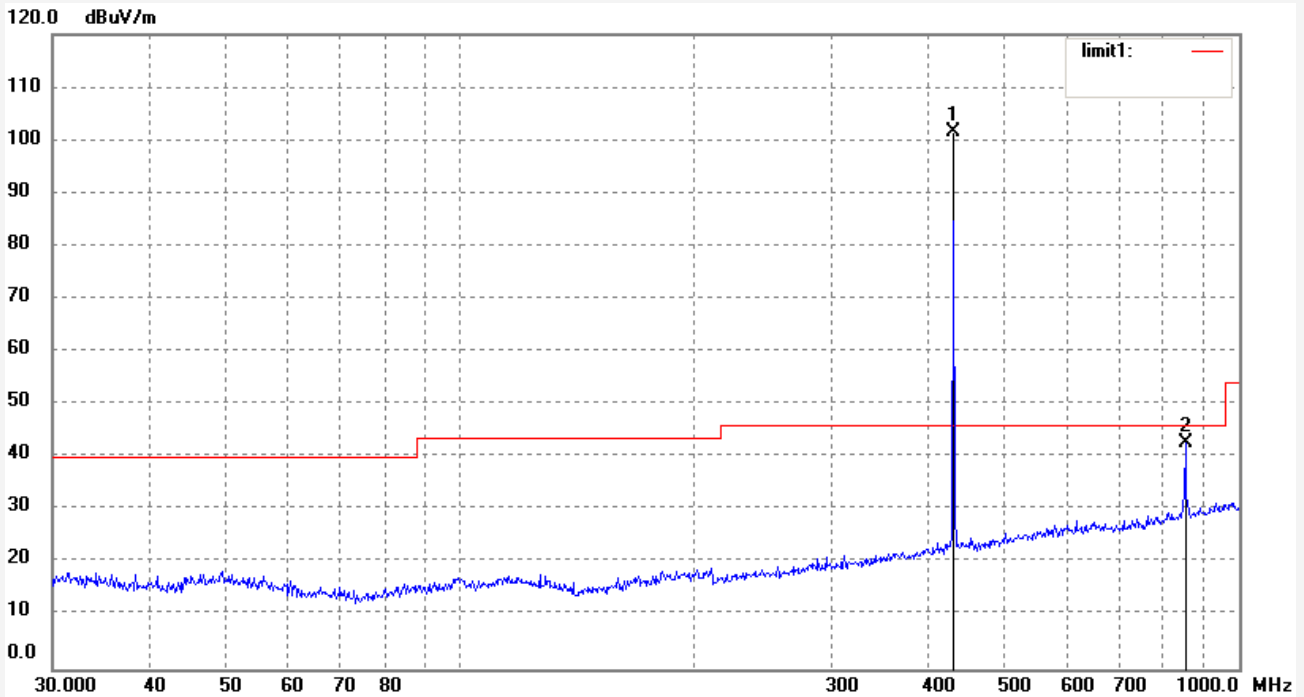

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	430.3052	107.54	-6.03	101.51	46.00	55.51	peak			
2	853.7545	41.93	0.74	42.67	46.00	-3.33	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #256
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:31:37
Engineer Signature: PEI
Distance: 3m

Note:

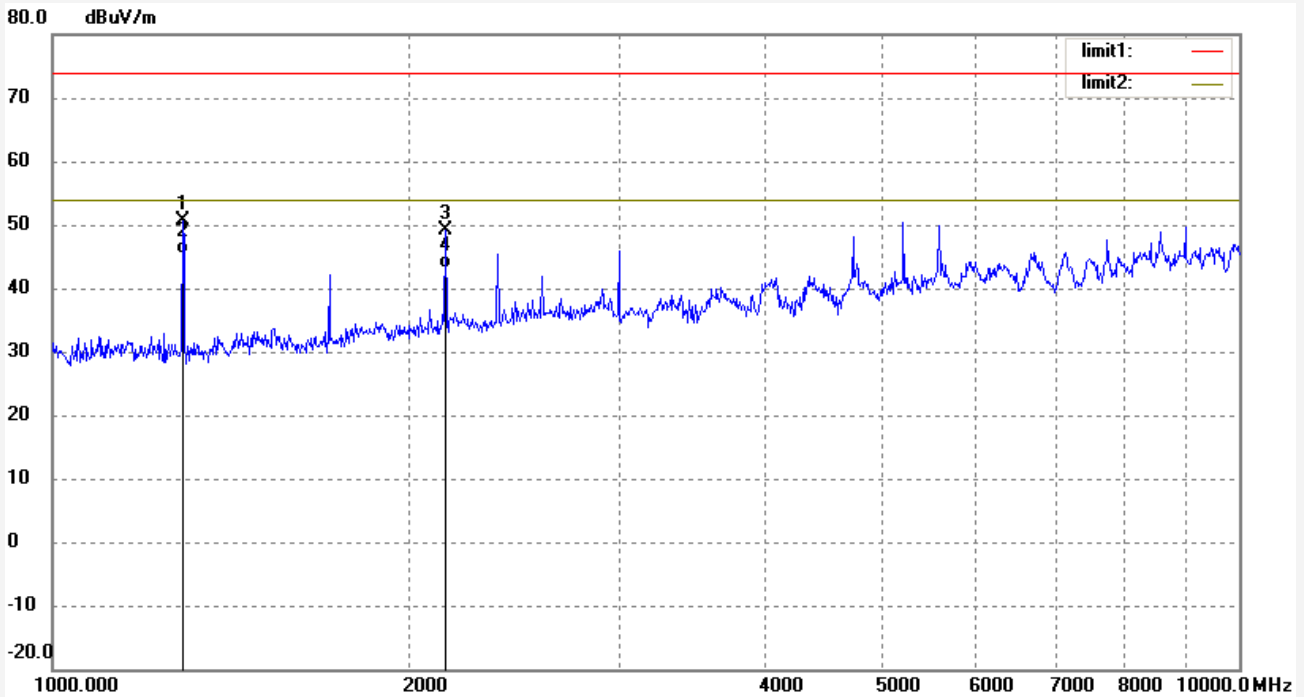

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1287.563	62.77	-12.22	50.55	74.00	-23.45	peak			
2	1287.563	57.68	-12.22	45.46	54.00	-8.54	AVG			
3	2144.466	57.71	-8.50	49.21	74.00	-24.79	peak			
4	2144.466	51.54	-8.50	43.04	54.00	-10.96	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #257
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 433MHz
Model: RFM98-433S2(13dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3.3V
Date: 2013/12/30
Time: 16:33:01
Engineer Signature: PEI
Distance: 3m

Note:

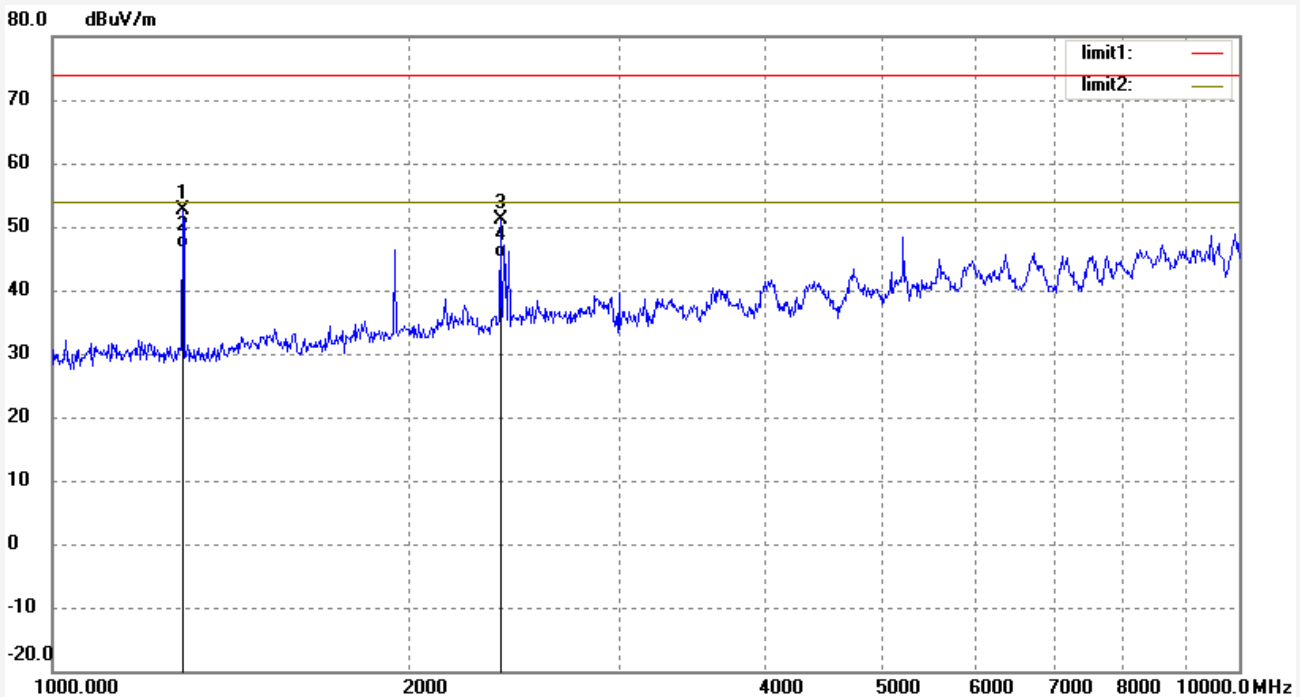

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1287.563	64.95	-12.22	52.73	74.00	-21.27	peak			
2	1287.563	58.97	-12.22	46.75	54.00	-7.25	AVG			
3	2385.852	58.68	-7.56	51.12	74.00	-22.88	peak			
4	2385.852	52.64	-7.56	45.08	54.00	-8.92	AVG			