REV. 更改	DESCRIPTION 说明	ENG. 修改人	APPROVE 审核

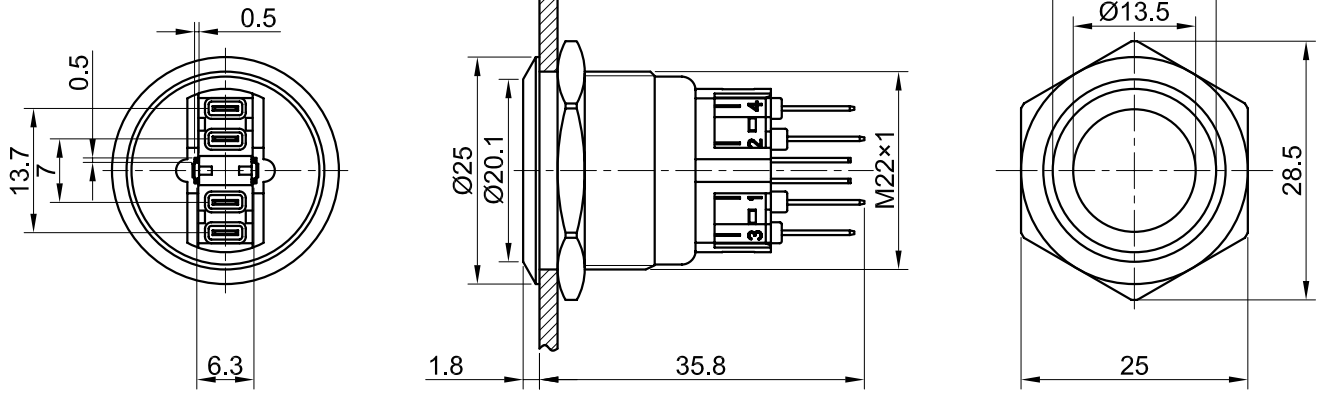



PANEL CUTOUT
MAX.PANEL THICKNESS
8.0mm



Contact Composition
(1,2 are normal closed(NC); 3,4 are normal opened(NO).)



Seal Ring

SPECIFICATIONS:

1.Max.Switch Rating: Ith:5A Ui: 250VAC.
2.Electrical Life: ≥50,000cycles.
3.Contact Resistance: ≤50mΩ.
4.Insulation Resistance: ≥1,000MΩ.
5.Dielectric Strength: 2,000V RMS 50Hz.
6.Operating Temperature: -25℃～ +55℃.
7.IP Class: IP65(Momentary:IP67 Made to order),IK10.
8.Torque: 1Nm Max.applied to nut.
9.Operating Force: About 4N.
10.Operation Mode: Momentary type.
11.Contact Configuration: 1NO1NC.
12.Ring Illuminated.LED Color:Red and Green and Blue.
13.LED Rated Voltage:5V.
14.The Front Shape : Flat Round.
15.Terminal Type: Pin Terminal(2.8 x 0.5mm).
16.Operation mode:Momentary.

MATERIALS:

1.Button: Stainless steel.
2.Contact: Silver alloy.
3.Body: Stainless steel.
4.Base: PA.

Part Number: PM221-11E/42RGB/12V/S

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 ↑	±0.40mm
MATERIAL	

USED 用途		APPD 审核	CH 2017/02/17
FINISH 处理		CHKD 校对	CKL 2017/02/17
SCALE 比例 1. 2 / 1	UNIT 单位 mm	DR. 制图	HMJ 2017/02/17
TITLE 名称 Anti-vandal ring illuminated push button switch			
DWG NO. 图号		SIZE 图纸 A4	
FILE NAME 档案名称	SHEET 张 1 / 1	REV. 更改	1