


图纸未注尺寸公差标准

基础尺寸	<=5mm	>5~15mm	>15~100mm	>100~300mm	>300~500mm	500mm以上
公差要求	±1	±3	±5	±10	±15	±20

REV (版本)	REVISION DESCRIPTION(更改描述)	Approve By(核准)	DATE(日期)

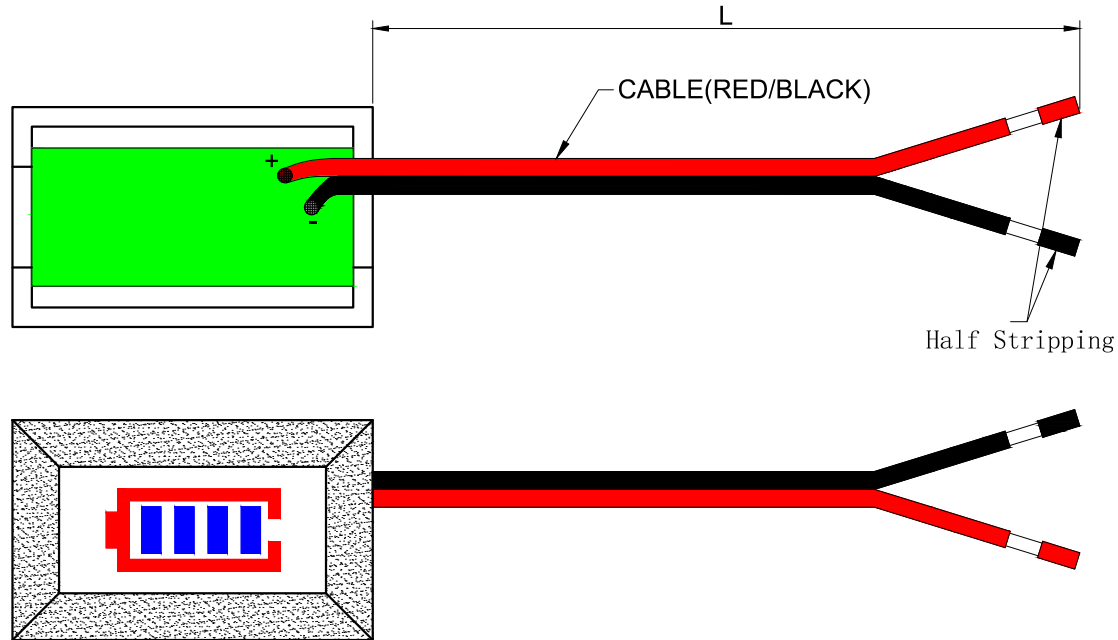

Voltage allowable error: ± 2%
 4 battery levels: 25%, 50%, 75%, 100%
 Working current: 5-15mA
 Refresh speed: approximately 300mS once
 Working temperature: -21 -65
 Display color: blue
 Lead length: 15 centimeters
 External dimensions: 48 * 29 * 22mm - length * width * height
 Installation hole: 46 * 27mm
 Net weight of the product: 15 grams
 Product gross weight: 15 grams

RoHS

LCD Assembly

Drawn By (制图)	ANDY	Date (日期)	2024.7.09	CUSTOMER (客户名称)	
Checked By (校核)		Date (日期)		CUSTOMER P/N (客户料号)	
Approved By (批准)		Date (日期)		DRAW P/N (图号)	
Unit(单位)	mm	REV. (版本)	A	Drawing Size (图纸尺寸)	A4
Tolerance(公差)	/	PROJECTION(投影方向)			