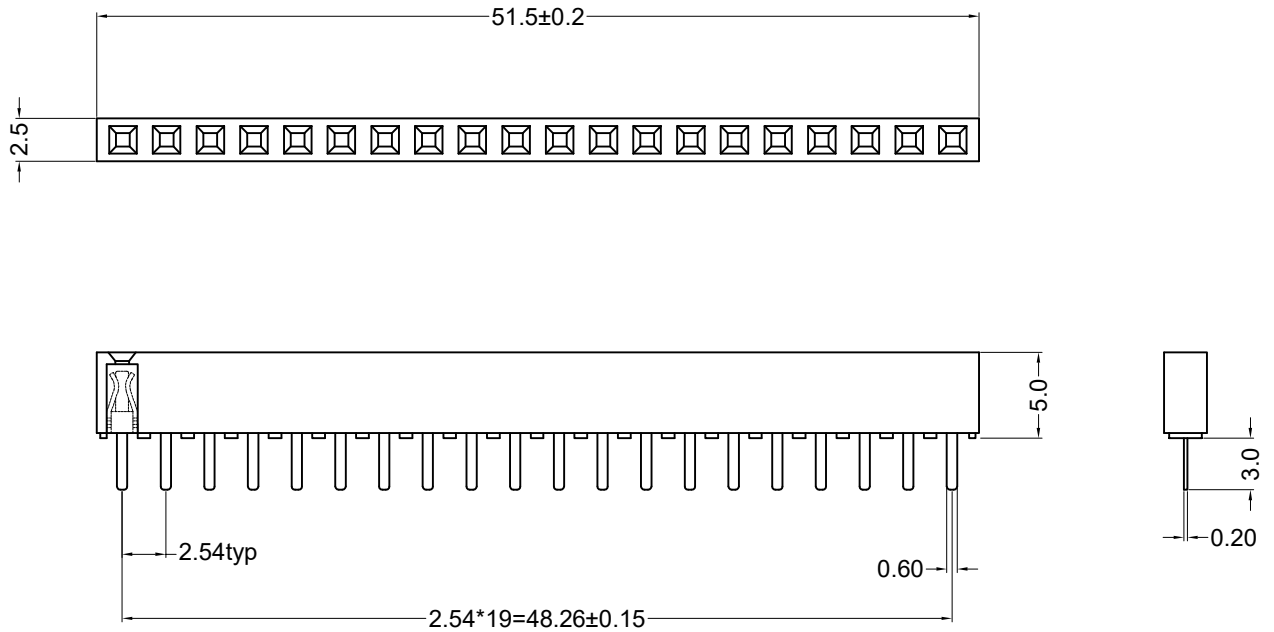


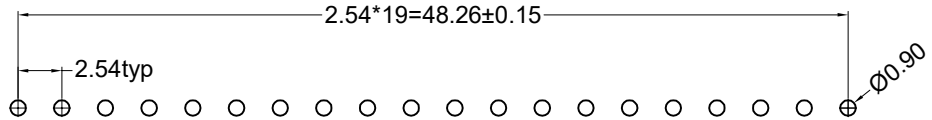


# P.C.B Layout

材质 Material:
绝缘体 Insulator: Glass filled PBT UL94V-0 ,Black
接触件 Contacts: Phosphor Bronze
电镀层 Plating: Whole Gold plated over Nickel

电气性能 Electrical Characteristics:
接触电阻 Contact Resistance: 30mΩmax. at DC 100mA
绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC
耐压 Withstanding Voltage: 500V AC/rms 50Hz For 1 minute
工作电流 Current Rating: 2 AMP
使用温度范围 Operating Temperature: -40 ºC～+125 ºC

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | TITLE | PCB SOCKET 2.54mm(0.100") 1*20pin排母_U_H5.0_D3.0mm | GENERAL TOLERANCE x. : ±0.3 x.x: ±0.2 x.xx: ±0.1 | DRAWN BY DATE | DENK CONNECTOR DENG KE ELECTRONICS CO., LTD 登科电子有限公司 | |
| | | | | SERIES | | | CHECKED BY DATE | | |
| | | | | CUSTOMER P/N | | ANGLE TOLERANCE x. : ±2° x.x: ±1° x.xx: ±0.5° | | | |
| | | | | UNITS | mm | PROJECTION | APPROVED BY DATE | DRAWING NO. | SHEET 1 OF 1 |
| SCALE | DESCRIPTION | CHK | DATE | SCALE | | | | SHEET SIZE A4 | REV. A0 |