
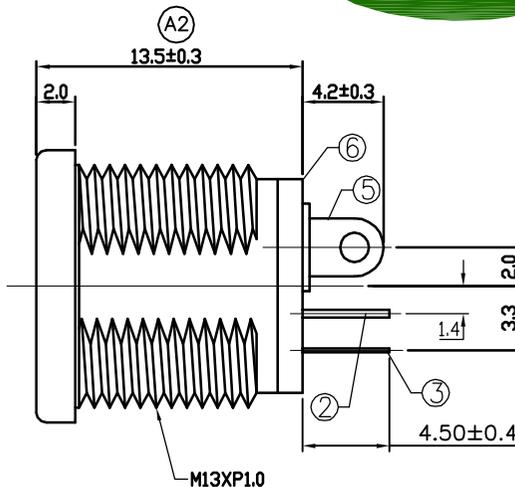




RoHS Compliant

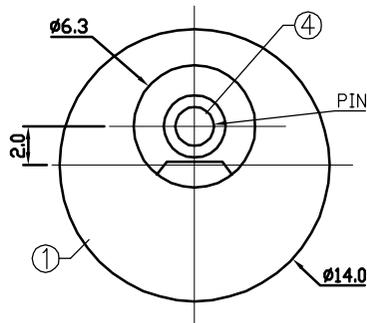

Specifications:
 Rating:DC 16V 1.5A;
 Operating Temperature Range:-40°~+105°C

Electrical:
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute
 life test: 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
6	COVER	1	PF	
5	CONTACT FOOT	1	BRASS	Cu/Sn-Plating
4	PIN	1	BRASS	Ni-Plating
3	SPRING	1	PHORPHOS BRASS	Cu/Sn-Plating
2	FLAT PIECE	1	BRASS	Cu/Sn-Plating
1	HOUSING	1	PBT/ABS	

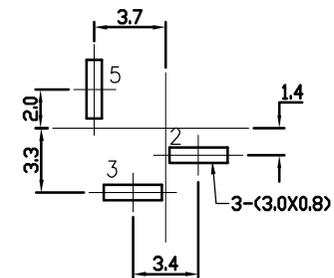

(Tolerance:0.05)
 Recommended PCB Layout

REV.	ECN. NO.	DR. BY	DATE	DR. BY:	TITLE :	GENERAL TOLERANCE:	UNIT:	SCALE:	SHEET:	THIRD ANGLE PROJECTION	A4
A5				DR. BY:	DC JACK	LINEAR	mm	1:1	1/1		A4
A4				<i>Tom Liu</i>		ANGLES					
A3				CHKD.:	PART NO : DC-022	X.: ±0.30					
A2	Modify Dim	<i>Tom Liu</i>	Nov-16-2015	<i>Jack Wu</i>	DWG. NO.: CXRD151116-008	X.X: ±0.20					
A1	ORIGINAL	<i>Tom Liu</i>	May-31-2013	APPD.:	DATE: May-31-2013	X.XX: ±0.15					
				<i>Kane He</i>		X.XXX: ±0.10					

