The drawing contained herein is the exclusive property of WiseChip. It is not allowed to copy, reproduce and or disclose in any formats without permission of WiseChip.

Item	Date	Remark
A	20111026	Original Drawing

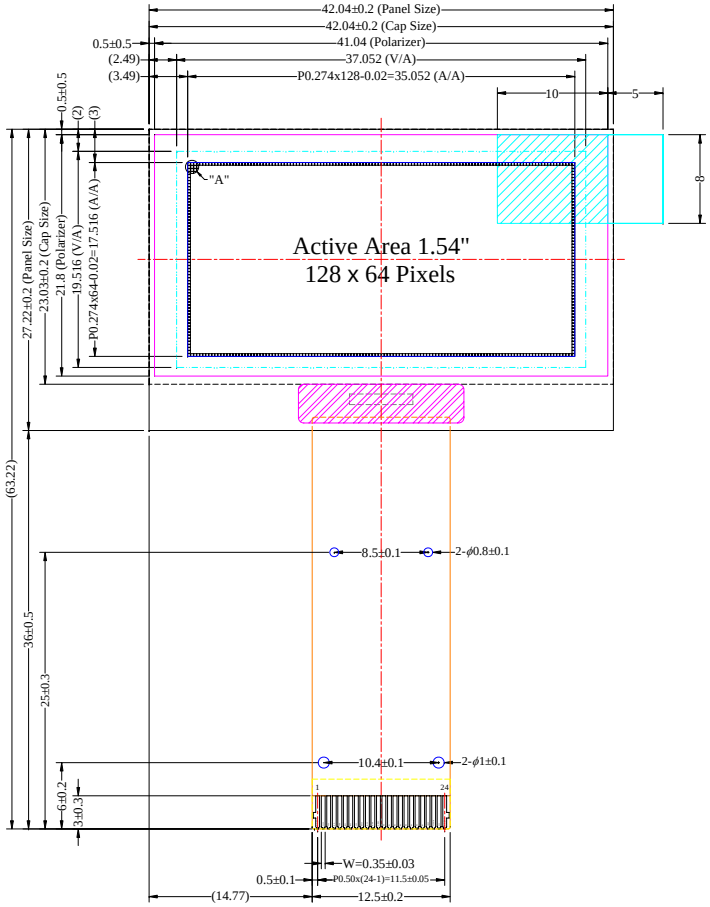

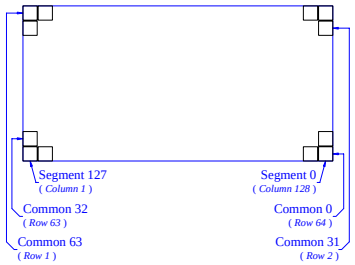



Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)

Notes:

1. Color: White
2. Driver IC: SSD1309
3. FPC Number: UT-0205-P05
4. Interface:
   8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (1.55 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number		Rev.
							DMX2864CNGFAG		A
	Unless Otherwise Specified		Title	UG-2864KSWMG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package			Material		
	Unit	mm					Soda Lime / Polyimide		
	General Roughness								
	Tolerance			Drawn	E.E.	Panel / E.	P.M.		
	Dimension	±0.3	By	Dora Yang	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet	Size
	Angle	±1	Date	20111026	20111026	20111026	20111026	1:1	1 of 1	A3